

C series



Compact tracked cranes

HOEFLON[®]

UP
EQUIP

Who we are

UPequip is specialized in challenging access solutions. It is strongly embedded in our DNA to find a solution for any given access defiance. We are dedicated to provide customers easy, safe and reliable equipment to access hard-to-reach working areas. We strive to be an important part of our customer's daily success and overall productivity.

Welcome to our **Simple Inside™** world.

We, at UP Equip are committed to supply the best customer service and spread usage of the simplest, safest and fairest priced compact tracked cranes. Our team is composed of highly qualified technicians who's passion for learning never come to an end. The knowledge and experience we have gathered over time is invaluable. Not only do we understand perfectly how compact cranes are built, we know how to help and explain when operational and technical issues arise.

All our actions are ruled by fundamental principles;


- Integrity:** We never sacrifice integrity for profit. We are transparent in all our business dealings.
- Respect:** We provide a safe and healthy environment for our team members. We treat all people with dignity and respect. We value the differences in people's thinking, backgrounds and are committed to team member's development. But far more important: We always tell the truth, whether you like it or not.
- Improvement:** We continuously search for new and better ways of doing things, eliminating waste and continually improving. We challenge the status quo everyday.
- Leadership:** We work to serve the needs of our customers, investors and team members. We nurture a culture of "chain of support" versus "chain of command. We ask what we can do to help.
- Courage:** We have the personal and professional courage to do the right things and take risks that may cause us to win, as well as to fail periodically. We make decisions and take actions. Failure is success when we learn from it.



Cseries

- ✓ **Ultra narrow, from 29^{1/2} to 31^{1/2} inches**
- ✓ **Super Strong, up to 8810 lbs cap.**
- ✓ **Amazing height, up to 72 feet**
- ✓ **Versatile with Up and Over capability**

- ✓ Superior structural steel laser cut and CNC hydro formed construction with SSAB Domex™
- ✓ Oversized heat treated corrosion resistant pivots points and linkages
- ✓ Superior lifting capability and best precise control on the market
- ✓ Heavy-duty rubber tracks with high tensile sealed internal steel cable with curbshield
- ✓ Longer tracks for increased climbing stability and better weight distribution for sensitive ground
- ✓ Robust undercarriage with serviceable idler wheels, hubs and motors
- ✓ Solid-state 12 Volts components
- ✓ Unique patented multiple positioning swing out and telescopic outriggers to set your crane anywhere
- ✓ Exclusive 200° articulated and telescopic jib with multiple telescopes
- ✓ Exclusive telescopic booms wear pads made of super slick UHDPE.
- ✓ Real time display for load, main + angles + length
- ✓ Easy to install accessories

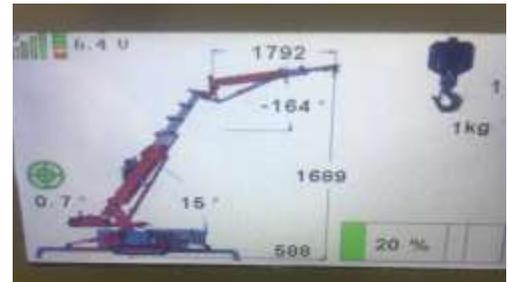

LIVE MONITORING



SET IN CONFINED SPACE



ENTER ANY SINGLE DOOR



UP AND OVER CAPABILITY



7200 SET-UP POSSIBLE



CLIMB WITH EASE



C1

29.5" WIDTH 1380 LBS CAPACITY 16' LIFTING HEIGHT PICK AND CARRY

Max lift height with hydraulic telescopic Jib	16'
Max capacity	1380 lbs @ 3' radius
Horizontal outreach	305 lbs @ 13' out
Available configurations	24V Battery 110Vac/ 220Vac to 24Vdc converter available
Minimum size in travel position	29.5"w x 59"l x 55"h
Maximum width w. extended carriage	42"
Travel speed	Infinite proportional remote + 2 RPM speed. Up to 1,88 MPH
Operational weight	1500 lbs
Counterweight	Variable position
Turret rotation	140° ; 70° on each side from center



C1 load chart

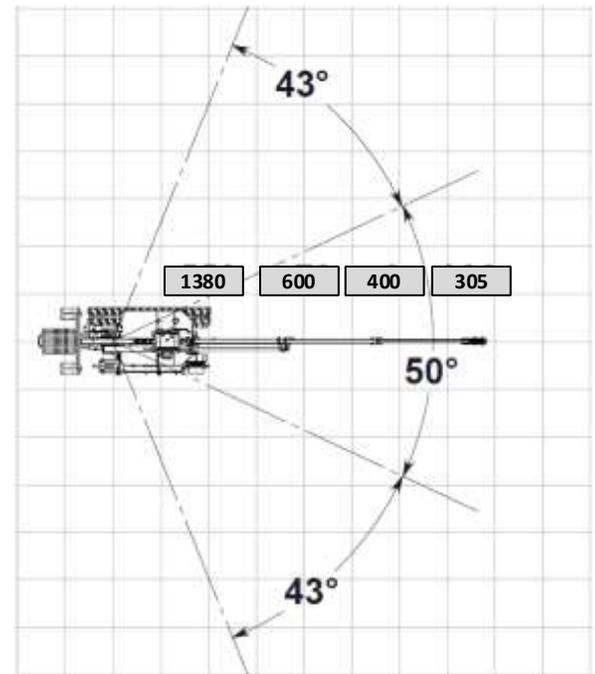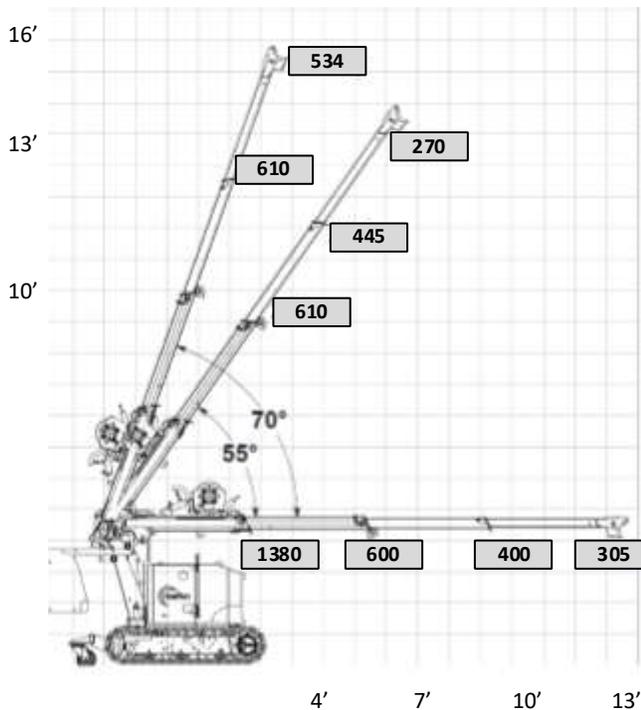

C1 XXXX CAPACITY BOOM WITHIN 50° OF TURRET ROTATION

C1 Features and options

- ✓ Wireless remote for boom, outriggers and drive
- ✓ LCD display on remote control for live chassis angle, boom and jib angle, height + reach, load
- ✓ Glow plugs and winter start package
- ✓ Pick and Carry capability
- ✓ Searcher hook
- ✓ Hydraulic winch 2200lbs/4400lbs/ 8800lbs
- ✓ Non-marking tracks
- ✓ Extending tracks
- ✓ Fast Idle automatic
- ✓ Storage boxes
- ✓ Special painting
- ✓ Special electric motor
- ✓ Vacuum lifter with remote control



C4

29.5" WIDTH 5170 LBS CAPACITY 46' LIFTING HEIGHT

Max lift height with hydraulic telescopic Jib	46'
Max lift height without jib	32'
Max capacity	5170 lbs @ 6' radius 4410 lbs @ 10' radius 1150lbs @ 20' radius 450lbs @ 30' radius

Horizontal outreach	without jib	880lbs @ 24' out
	with jib	317lbs @ 38' out


Available configurations

- Honda gas air cooled
- Honda Propane air cooled
- Honda dual fuel Gas + Propane
- Yanmar diesel water cooled
- Add-on 4 hp electric motor



Minimum size in travel position	29.5"w x 100"l x 67"h
Maximum width with extended carriage	42"
Travel speed	Infinite proportional remote + 2 RPM speed. Up to 1,88 MPH
Operational weight without jib	4187 lbs
Operational weight with jib	4730 lbs
Counterweight	Variable deployment upon load + self unloading
Maximal footprint on outriggers	165" x 173"
Minimal footprint on outriggers	32" x 177"
Outriggers set-up possibilities	
With "infinite positioning"	7200 Possibilities
With standard outriggers	32 Possibilities
Outriggers set up standard	2 positions each: 0° and 48°
Outriggers set up optional	Infinite rotational positions 0° to 90°
Outriggers telescopic beam	Multiple positions, pinned or hydraulic



C4 load chart

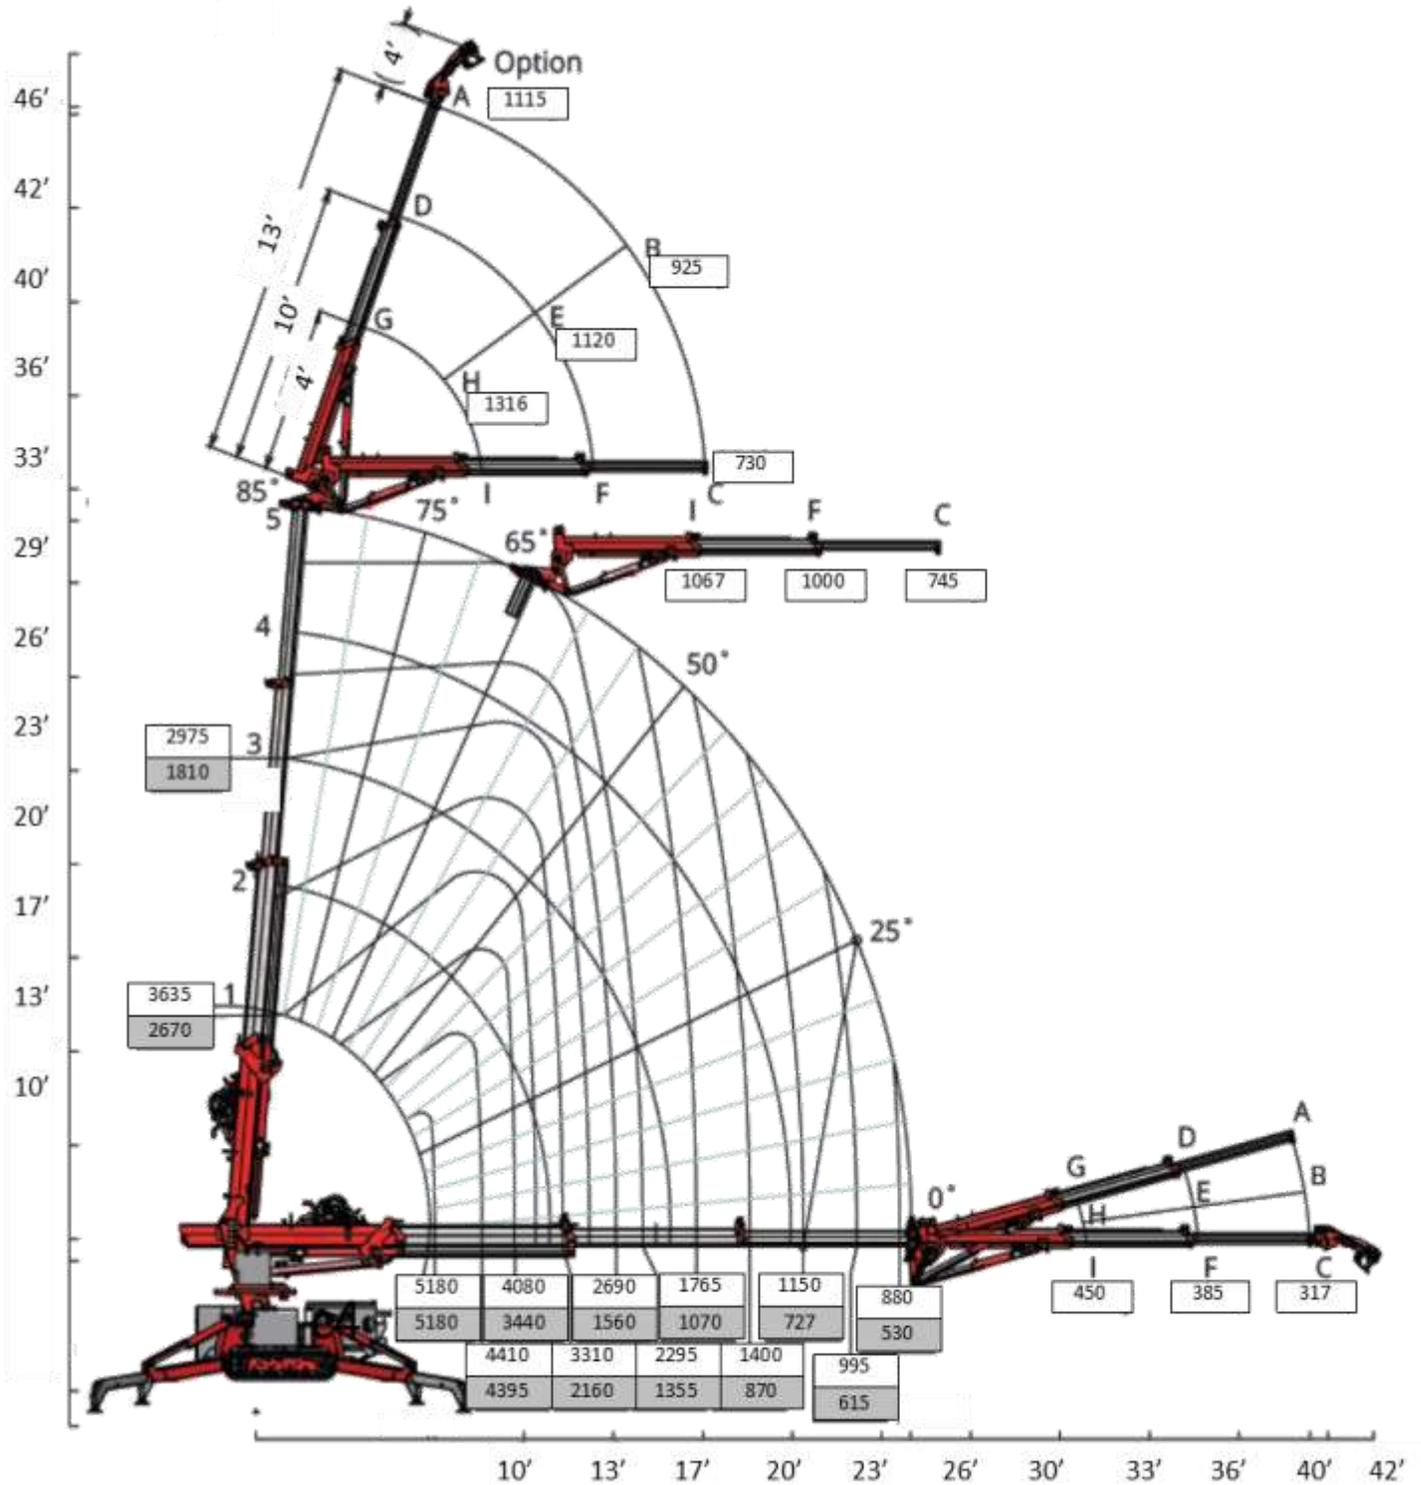

C4

XXXX	CAPACITY WITH OUTRIGGERS EXTENDED
XXXX	CAPACITY WITH OUTRIGGERS RETRACTED

C4 set-up and dimensions

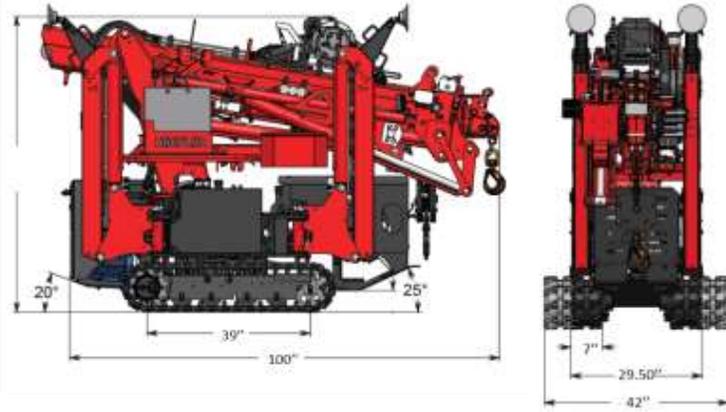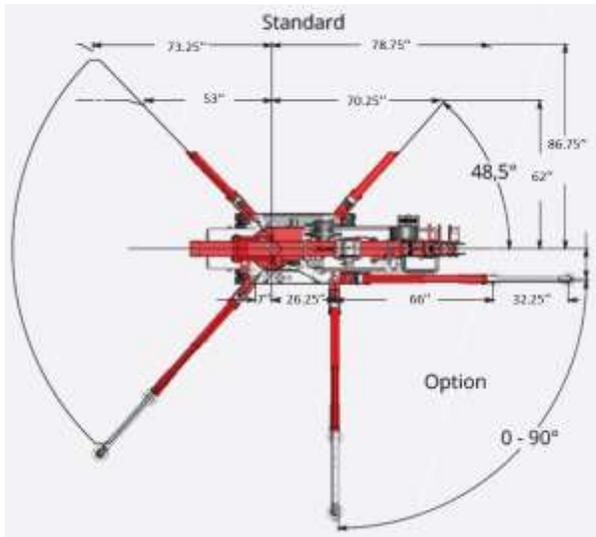

C4 Features and options

- ✓ Wireless remote for boom, outriggers and drive
- ✓ LCD display on remote control for live chassis angle, boom and jib angle, height + reach, load
- ✓ Glow plugs and winter start package
- ✓ Pick and Carry capability with longer carriage
- ✓ Searcher hook
- ✓ Full hydraulic telescopic jib 3 booms
- ✓ Manual jib 36" x 30° adjustable
- ✓ Continuous slewing turret
- ✓ Hydraulic winch 2200lbs/4400lbs/ 8800lbs
- ✓ Telescopic outriggers
- ✓ Telescopic outriggers Full hydraulic
- ✓ Curved Outriggers end-tips
- ✓ Swing Out outriggers, 2 positions 0° / 48°
- ✓ Swing Out outriggers, with infinite rotation (each 1°)
- ✓ Non-marking tracks
- ✓ Extending tracks
- ✓ Fast Idle automatic
- ✓ Storage boxes
- ✓ Special painting
- ✓ Special electric motor
- ✓ Vacuum lifter with remote control



C6

29.5" WIDTH 6940 LBS CAPACITY 52' LIFTING HEIGHT PICK AND CARRY OPTION

Max lift height with hydraulic telescopic Jib
Max lift height without jib

52'
38'

Max capacity

6940 lbs @ 6' radius
5280 lbs @ 10' radius
2200 lbs @ 20' radius
1122 lbs @ 30' radius

Horizontal outreach

without jib 1157 lbs @ 33' out
with jib 465 lbs @ 45' out

Available configurations

Yanmar diesel water cooled
Add-on 4 hp electric motor

Minimum size in travel position

29.5"w x 105"l x 67"h

Maximum width with extended carriage

42"

Travel speed

Infinite proportional remote
+ 2 RPM speed. Up to 1,88 MPH

Operational weight without jib

5840 lbs

Operational weight with jib

6170 lbs

Counterweight

Variable deployment upon load + self unloading

Maximal footprint on outriggers

165" x 173"

Minimal footprint on outriggers

32" x 177"

Outriggers set-up possibilities

With "infinite positioning"

7200 Possibilities

With standard outriggers

48 Possibilities

Outriggers set up standard


3 positions each: 0°/45°/90°

Outriggers set up optional


Infinite rotational positions 0° to 90°

Outriggers telescopic beam

Multiple positions, pinned or hydraulic

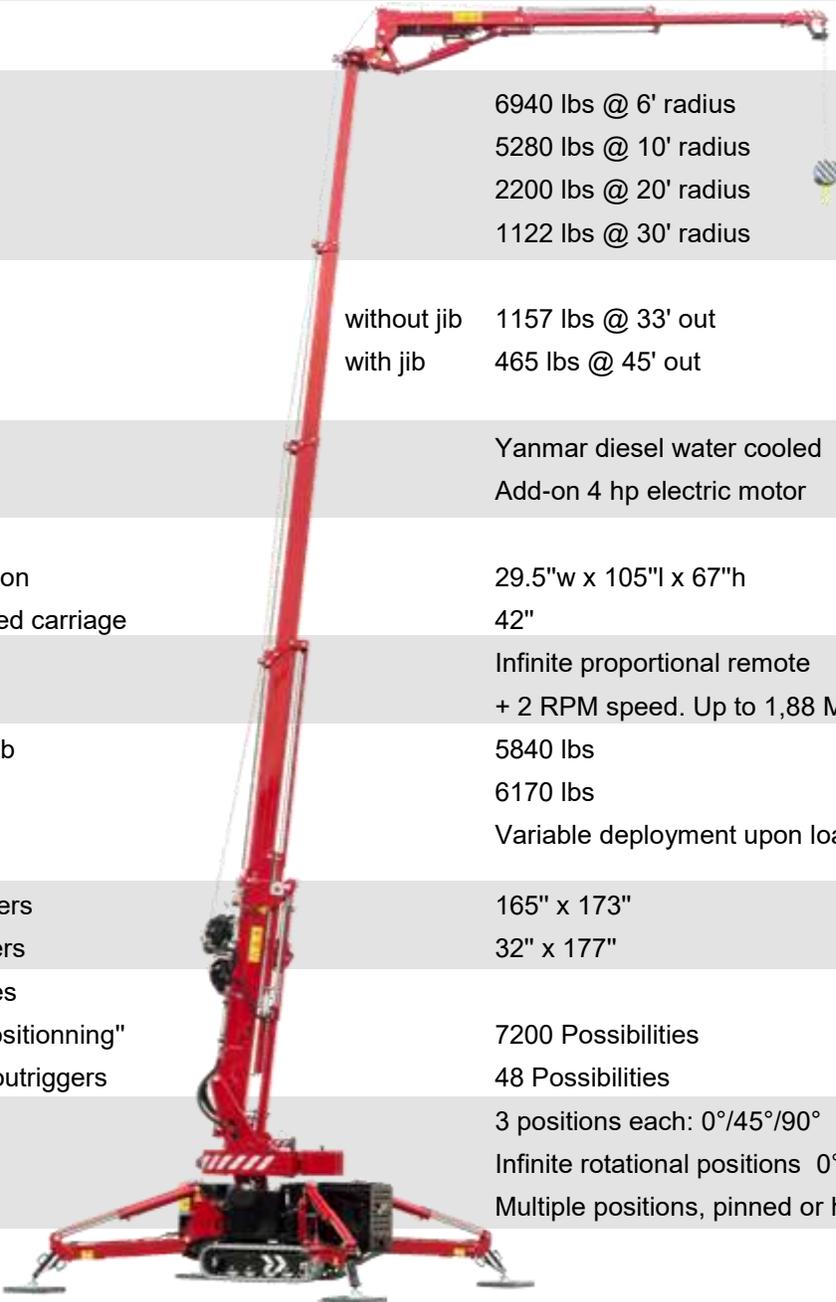




C6 load chart

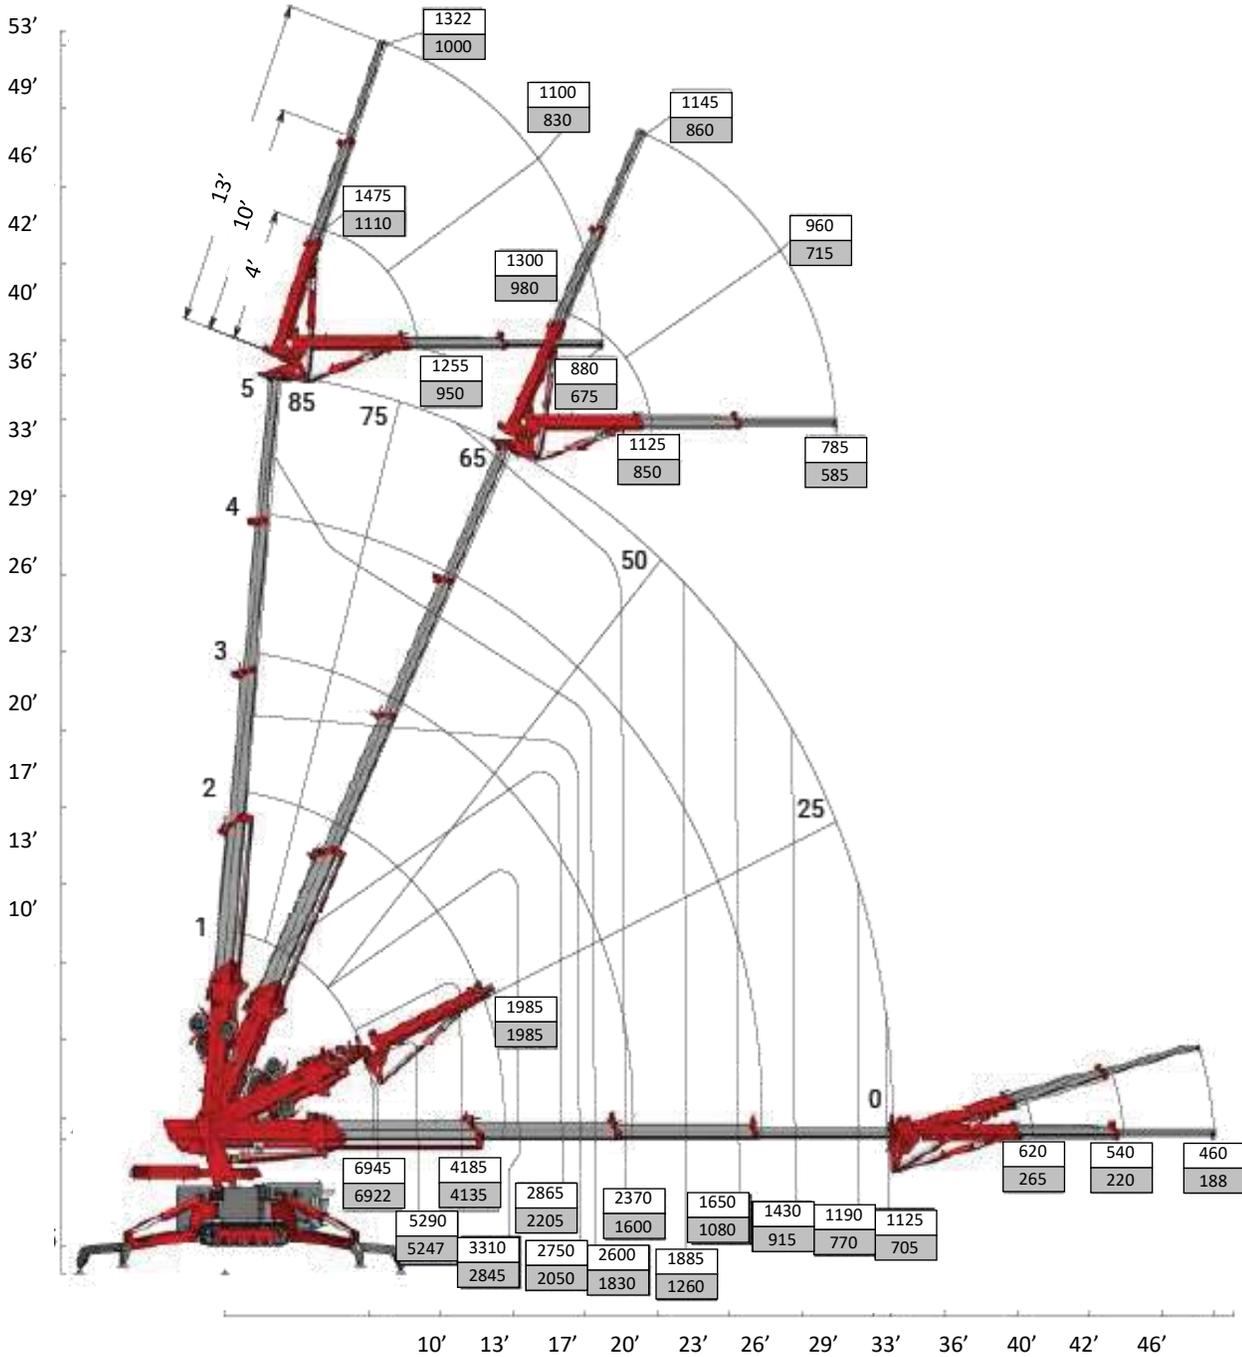

C6

xxxx	CAPACITY WITH OUTRIGGERS EXTENDED
xxxx	CAPACITY WITH OUTRIGGERS RETRACTED

C6 set-up and dimensions

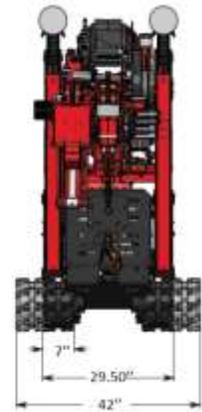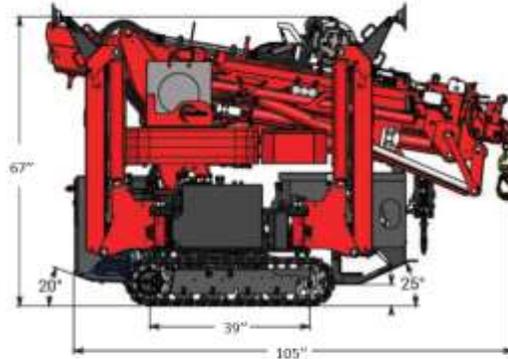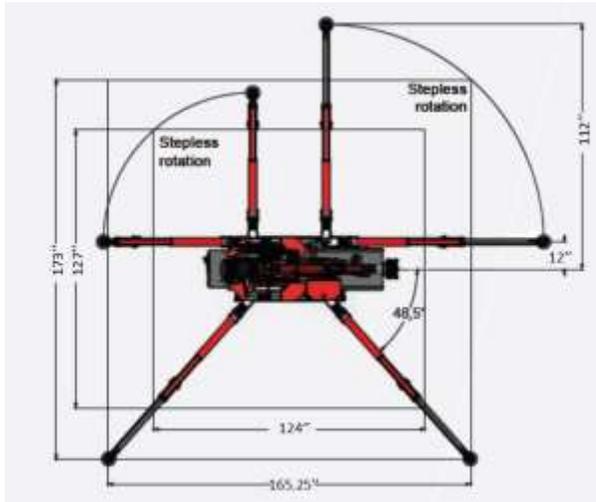

C6 Features and options


- ✓ Pick and Carry without outriggers
- ✓ Extra long carriage
- ✓ Wireless remote for boom, outriggers and drive
- ✓ LCD display on remote control for live chassis angle, boom and jib angle, height + reach, load
- ✓ Glow plugs and winter start package
- ✓ Pick and Carry capability with longer carriage
- ✓ Searcher hook
- ✓ Full hydraulic telescopic jib 3 booms
- ✓ Manual jib 36" x 30° adjustable
- ✓ Continuous slewing turret
- ✓ Hydraulic winch 2200lbs/4400lbs/ 8800lbs
- ✓ Telescopic outriggers
- ✓ Telescopic outriggers Full hydraulic
- ✓ Curved Outriggers end-tips
- ✓ Swing Out outriggers, 3 positions 0° / 45° / 90°
- ✓ Swing Out outriggers, with infinite rotation (each 1°)
- ✓ Non-marking tracks
- ✓ Extending tracks
- ✓ Fast Idle automatic
- ✓ Storage boxes
- ✓ Special painting
- ✓ Special electric motor
- ✓ Vacuum lifter with remote control




C10

**31.5" WIDTH
8810 LBS CAPACITY
72' LIFTING HEIGHT**

Max lift height with hydraulic telescopic Jib	72'
Max lift height without jib	53'
Max capacity	8810 lbs @ 6' radius 6380 lbs @ 10' radius 3740 lbs @ 20' radius 2200 lbs @ 30' radius
Horizontal outreach	without jib 1100 lbs @ 45' out with jib 465 lbs @ 65' out
Available configurations	Yanmar diesel water cooled Add-on 4 hp electric motor
Minimum size in travel position	31.5"w x 151"l x 78"h
Maximum width with extended carriage	43"
Travel speed	Infinite proportional remote + 2 speed. 1,88 MPH
Operational weight without jib	8696 lbs
Operational weight with jib	10358 lbs
Counterweight	Variable deployment upon load + self unloading
Maximal footprint on outriggers	180" x 180"
Minimal footprint on outriggers	36" x 184"
Outriggers set-up possibilities	
With "infinite positioning"	7200 Possibilities
With standard outriggers	80 Possibilities
Outriggers set up standard	5 positions each: 0° to 90°
Outriggers set up optional	Infinite rotational positions 0° to 90°
Outriggers telescopic beam	Multiple positions, pinned

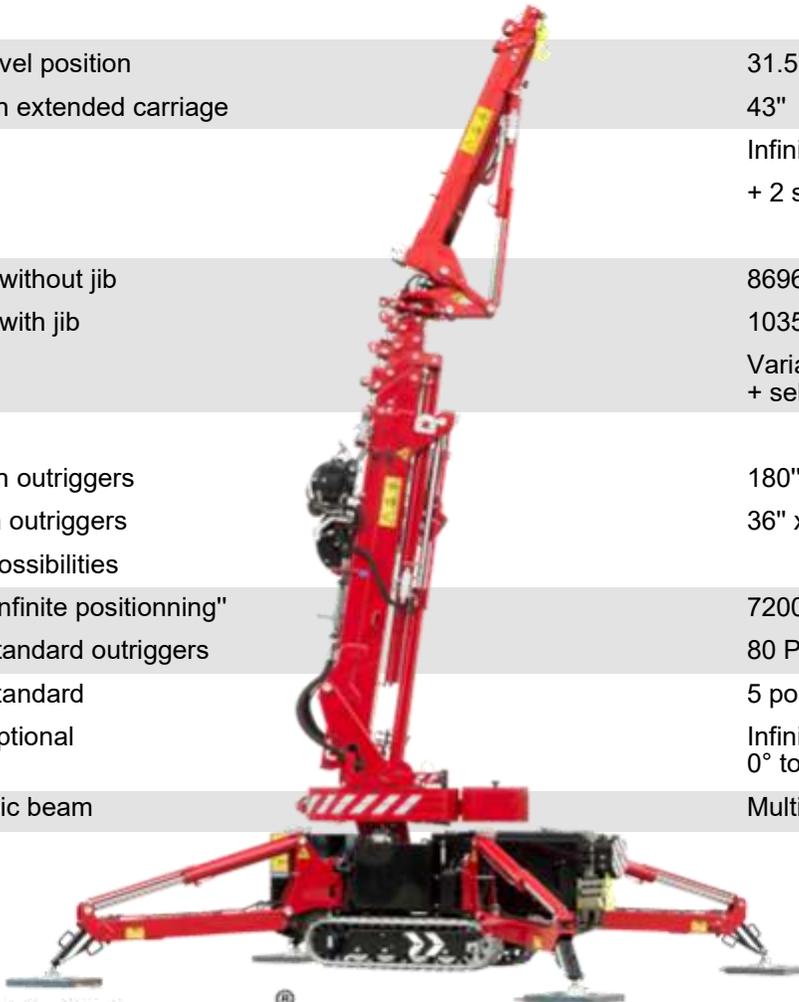




C10 load chart

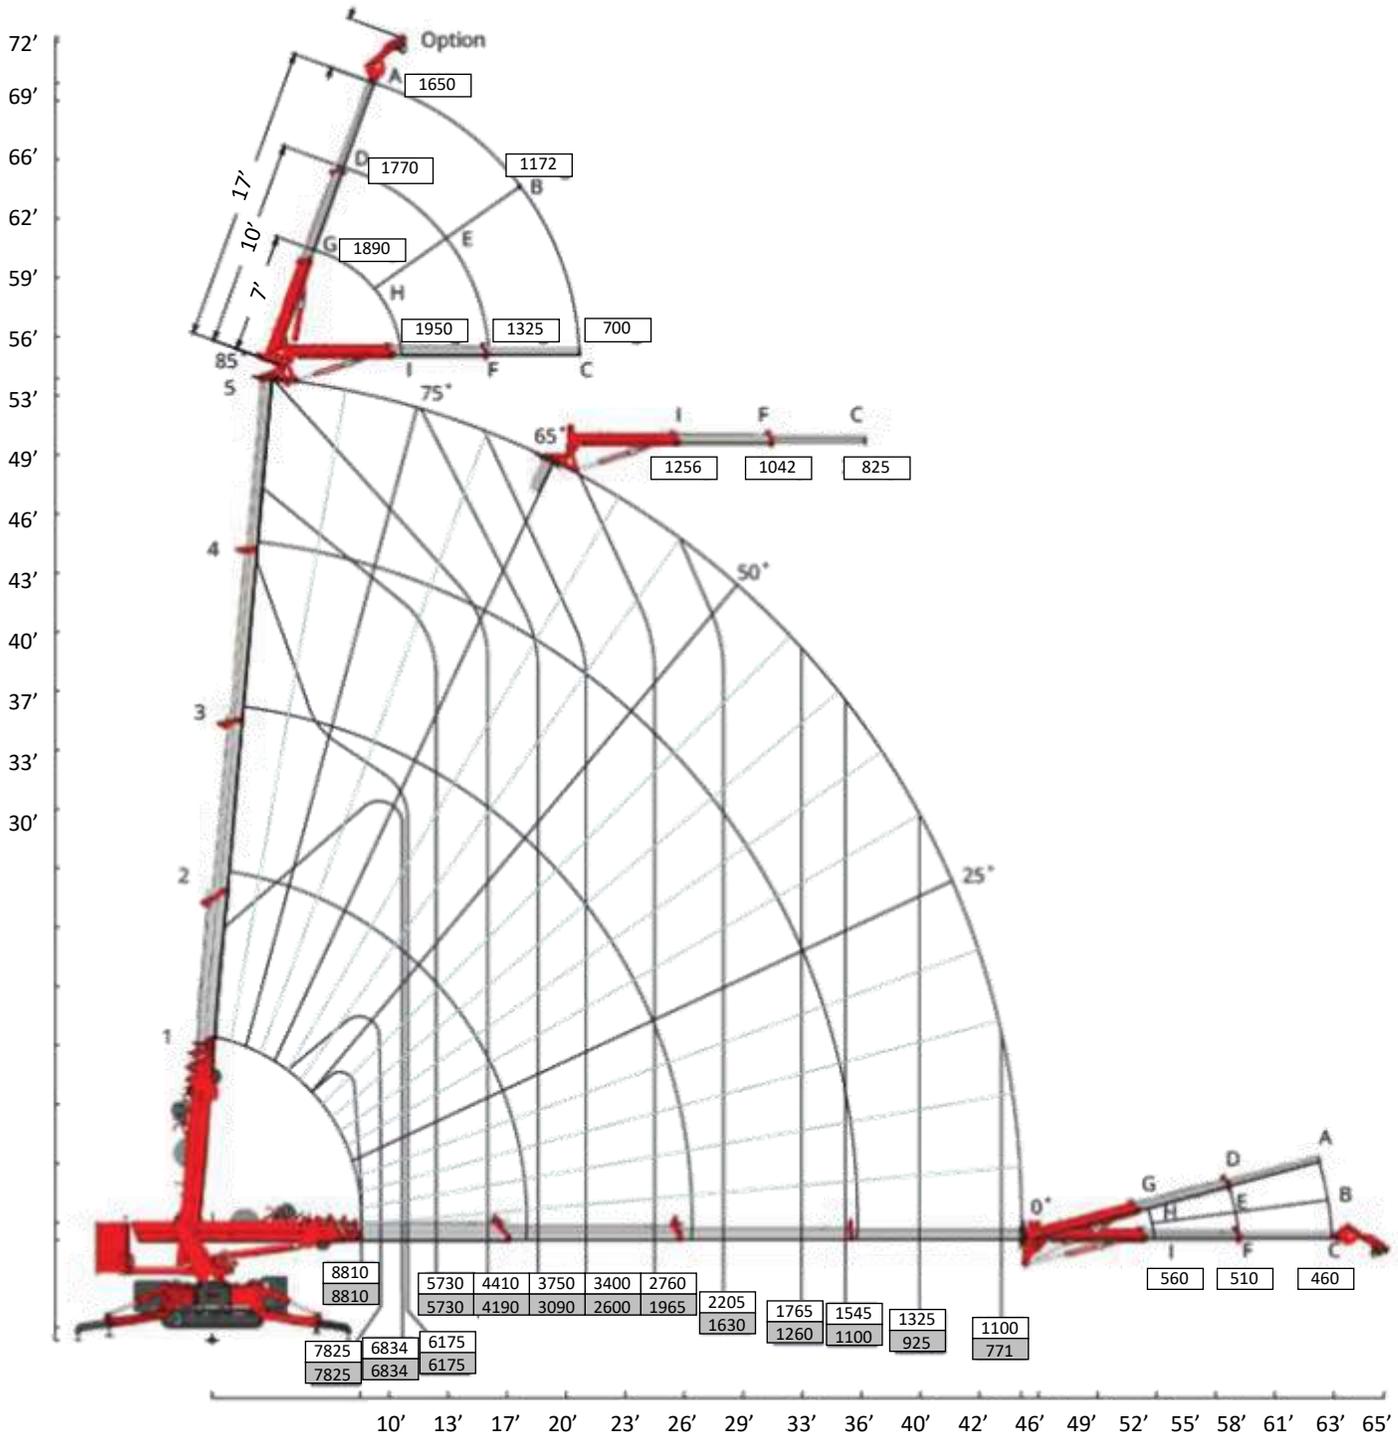

C10

XXXX CAPACITY WITH OUTRIGGERS EXTENDED
XXXX CAPACITY WITH OUTRIGGERS RETRACTED

C10 set-up and dimensions

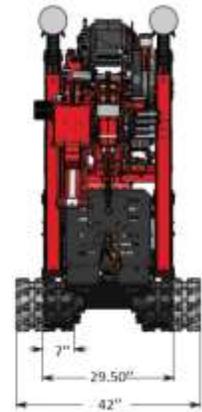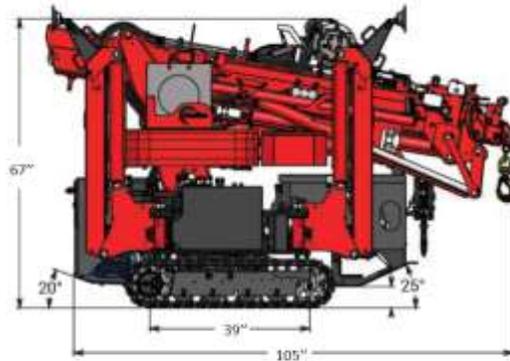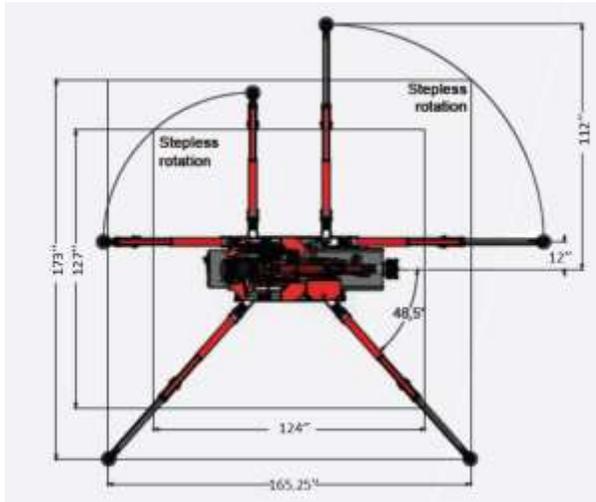

C10 Features and options

- ✓ Wireless remote for boom, outriggers and drive
- ✓ LCD display on remote control for live chassis angle, boom and jib angle, height + reach, load
- ✓ Glow plugs and winter start package
- ✓ Searcher hook
- ✓ Full hydraulic telescopic jib 3 booms
- ✓ Manual jib 36" x 30° adjustable
- ✓ Continuous slewing turret
- ✓ Hydraulic winch 2200lbs/4400lbs/ 8800lbs
- ✓ Telescopic outriggers
- ✓ Swing Out outriggers, 5 positions 0° to 90°
- ✓ Swing Out outriggers, with infinite rotation (each 1°)
- ✓ Non-marking tracks
- ✓ Extending tracks
- ✓ Fast Idle automatic
- ✓ Storage boxes
- ✓ Special painting
- ✓ Special electric motor
- ✓ Vacuum lifter with remote control



VL Vacuum lifter

Lifting capacity		1100 lbs
Suction cup size	Main	16" x 32"
	Secondary	2 cups of 16" x 16"
Total size with all cups installed		16" x 82"
Rotation		360° + 90° side tilt for glass roofing
Rechargeable battery autonomy		9 hours
Charger		110V or 220V
Total weight		75 lbs
Remote control		Separate from crane controls. 300 feet range



COMPACT CRANES



HOEFLON[®]

1-844-UP EQUIP.CA